



Grey Tundra Stone

Thickness

12 mm - 13 mm

Sizes

305 x 610	406 x 812
406 x 406	475 x 914
406 x 610	610 x 914
457 x 457	610 x 1220
610 x 610	



Natural Marble Stone

Φυσικό Μάρμαρο

Marmo Naturale

天然大理石



Tundra Grey is an elegant natural stone quarried in the Isparta region of Turkey. Originally a type of limestone, it transforms into marble through the forces of intense heat and pressure deep within the earth. Defined by its soft grey background and delicate light grey to white veining, it reveals a subtle, cloud-like pattern that brings a sense of calm sophistication to any space.





GREY TUNDRA



GREY TUNDRA CLASSIC




GREY TUNDRA SANDBRUSHED



SB GROOVES GREY TUNDRA



GREY TUNDRA SB GROOVES

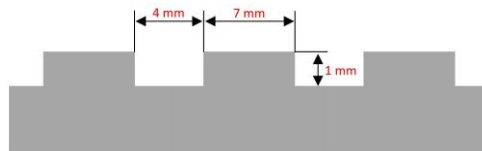

GREY TUNDRA

9 sizes

Grey

305 x 610 mm
406 x 406 mm
406 x 610 mm
457 x 457 mm
610 x 610 mm
406 x 812 mm
475 x 914 mm
610 x 914 mm
610 x 1220 mm

Grey Classic

305 x 610 mm
610 x 610 mm
610 x 1220 mm

Sandbrushed

305 x 610 mm
406 x 406 mm
406 x 610 mm
610 x 610 mm
610 x 1220 mm

2 thickness

12-13 mm

3 sb grooves

Grey

152 x 812 x 12 mm
305 x 305 x 12 mm
305 x 610 mm x 12 mm

Grout color:
White no. 1
Ice White no. 21
Dark Grey no. 4

TECHNICAL FEATURES

	TSEN		
Analysis	analysis	value	unit
Compressive strength	EN 1926	94	MPa
Water absorption at atmospheric pressure	EN 13755	0.69	%
Water absorption coefficient by capillarity	EN 1925	1.58	g/(m ² x s ^{0.5})
Abrasion resistance	EN 14157	15.65	mm
Slip resistance by means of pendulum tester (dry)	EN 14231	23.6	SRV
Slip resistance by means of pendulum tester (wet)	EN 14231	11.0	SRV
Real density	EN 1936	2.87	g/cm ³
Apparent density	EN 1936	2761	kg/m ³
Open porosity	EN 1936	1.53	%
Total porosity	EN 1936	3.80	%
Flexural strength under concentrated load	EN 12372	2.42	MPa
Flexural strength under constant moment	EN 13161	3.80	MPa



info@abmcosmos.com
www.abmcosmos.com